

Floating Gimbal Light

- Adjustable to 90° tilt.
- Type IC, Air-Tight No Housing Required
- Made of durable steel material
- I.C. rated for direct contact with insulation
- Suitable for DAMP LOCATION
- Ideal for sloped ceilings, wall washing, highlighting artwork, task or general lighting




















Inch




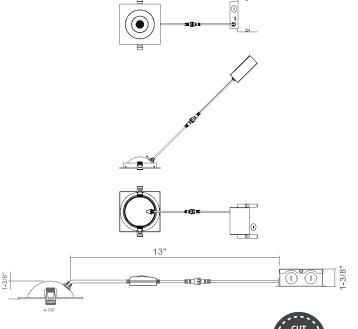

SPECIFICATIONS		
Application	Recessed Ceiling Mount	
Watts	12W	
CRI	90Ra+	
Color Temperature(K)	5CCT Selectable 2700K to 5000K	
Light Ouput(Im)	1000lm	
Default Driver Input	AC120V, 60Hz	
Dimming	Triac Dimming	
Power Factor	>0.9	
Approved Location	Damp Location	
Air Tight	Yes	
Operating Temp.	(-4°F~104°F) -20~40°C	
Beam Angle	38°	

Ordering

MODEL	сст	FINISH
TL4S-IC-12W-5CCT-D90-MW	5CCT selectable (2700-5000K)	MW (Matte White)

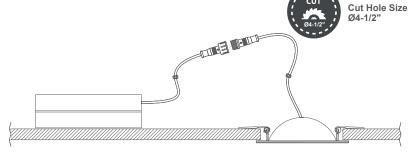

Accessories







