

6




Inch

LED Regressed Downlight Module


- Interchangeable trims
- Type IC, Air-Tight & Wet - No Housing Required
- Aluminum die-cast construction
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Anti-glare design



2 PART SYSTEM

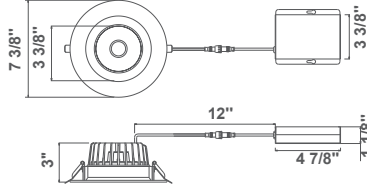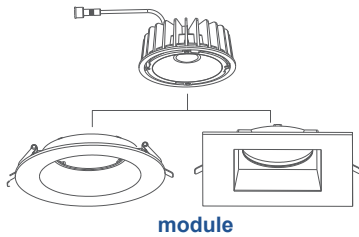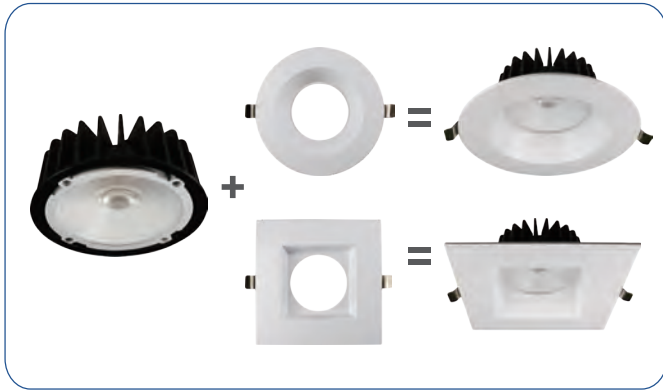

6" Round

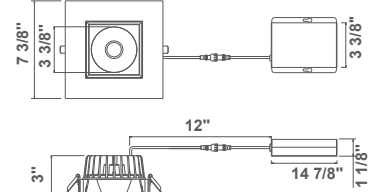

6" Square

SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	24W
CRI	90Ra+
Color Temperature(K)	5CCT Selectable 2700K to 5000K
Light Output(lm)	1800lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°


Ordering

MODELS	CCT	FINISH
RA6-PIC-24W-5CCT-D90	5CCT selectable (2700-5000K)	
RA6-RT-MW	ROUND TRIM	MW (Matte White)
RA6-ST-MW	SQUARE TRIM	MW (Matte White)




Cut Hole Size
Ø5-3/4" Round

Cut Hole Size
Ø6-1/4" Square

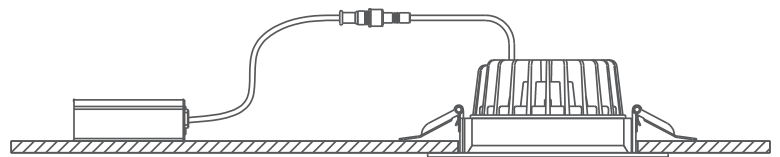

Accessories

Mounting Plate



R2.5-4-6-NC
See Page 60

Emergency Driver



BL-ELD-30W
See Page 60

Interchangeable Trims



RA6-RT-MW RA6-ST-MW

6" Reflector Trim
MW (Matte White)