



# 4 Inch

## Triac Dimming LED Slim Downlight


- Edge-lit technology, no glare or dark spots, instant-on
- No existing recessed housing or junction box required
- Dimming: TRIAC down to 10%
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Rated for a long life - over 50,000 hours

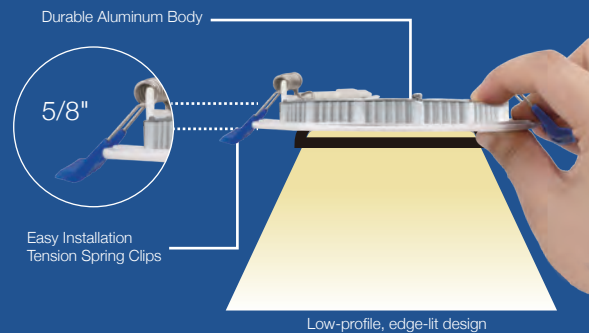

SPECIFICATION			
Model / Ordering guide	L4R-11W-3CCT-D90-MW	LA4R-11W-3CCT-D90-MW	LA4S-11W-3CCT-D90-MW
Shape	Round	Round	Square
Default Driver Input	AC120V, 60Hz	AC120V-277V, 60Hz	AC120V-277V, 60Hz
Size		4 in	
Watts		11W	
Light Output(lm)		700lm	
Color Temperature(K)		3CCT Selectable 3000K to 5000K	
CRI		90Ra+	
Dimming		Triac Dimming	
Power Factor		>0.9	
Approved Location		Wet Location	
Air Tight		Yes	
Operating Temp.		(-4°F~104°F) -20~40°C	
Beam Angel		120°	

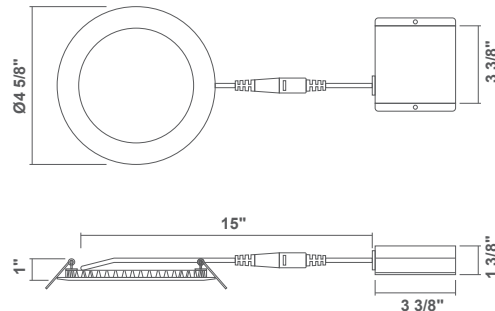

Cut Hole Size: Ø4-1/4"

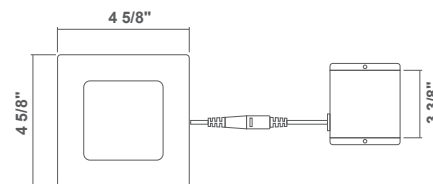

Size: Ø4-1/4"

### Accessories

<p><b>Mounting Plate</b></p> <p><b>R2.5-4-6-NC</b> See Page 60</p>	<p><b>Mounting Plate</b></p> <p><b>R4-NC</b> See Page 60</p>	<p><b>Emergency Driver</b></p> <p><b>BL-ELD-15W</b> See Page 60</p>
--	--	---