





LED Regressed Downlight - Fixed

4 and 9 Light Mini Series


- Durable Aluminum body.
- Simple snap-in installation is fast and easy
- I.C. rated for direct contact with insulation
- No housing required
- Input voltage: AC 120V 60Hz
- 100-10% dimming capability this fixture is compatible with industry standard TRIAC/ELV dimmers
- Rated for a long life - over 50,000 hours
- Suitable for DAMP LOCATION

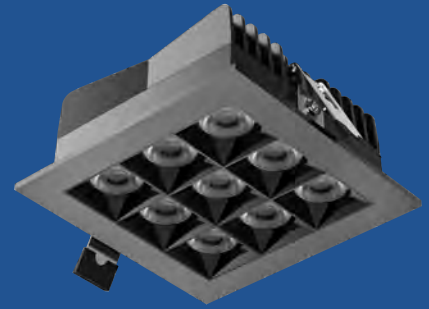

Cut Out: 2.99" X 2.83"



Cut Out: 3.99" X 3.99"

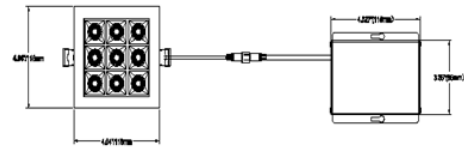

SPECIFICATIONS	
Application	Recessed Ceiling Mount
Light Output(lm)	970lm
Watts	12W
Optional Driver Input	Triac Dimming
CRI	90
Color Temperature(k)	3000K
Input Volts & Frequency	120V 60Hz
Approved Location	Damp Location
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

SPECIFICATIONS	
Application	Recessed Ceiling Mount
Light Output(lm)	2160lm
Watts	27W
Optional Driver Input	Triac Dimming
CRI	90
Color Temperature(k)	3000K
Input Volts & Frequency	120V 60Hz
Approved Location	Damp Location
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

Ordering

	CCT	FINISH
NR4SL-12W-3D90-38-GMW	3000K	GMW (Gun Metal-Matte White)
NR4SL-12W-3D90-38-GMB		GMB (Gun Metal-Matte Black)
NR9SL-27W-3D90-38-GMW	3000K	GMW (Gun Metal-Matte White)
NR9SL-27W-3D90-38-GMB		GMB (Gun Metal-Matte Black)

Accessories

Mounting Plate



NR-MULTI-NC
See Page 60