


# LED Regressed Downlight - Fixed

## 5 and 10 Light Mini Series


- Durable Aluminum body.
- Simple snap-in installation is fast and easy
- I.C. rated for direct contact with insulation
- No housing required
- Input voltage: AC 120V 60Hz
- 100-10% dimming capability this fixture is compatible with industry standard TRIAC/ELV dimmers
- Rated for a long life - over 50,000 hours
- Suitable for DAMP LOCATION

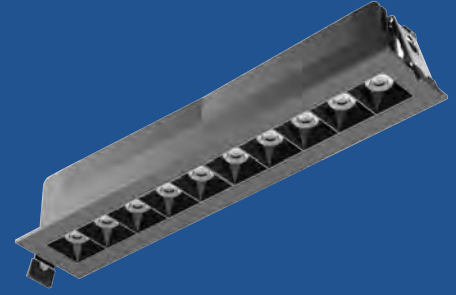

Cut Out: 5.25" X 1.23"



Cut Out: 11.1" X 1.53

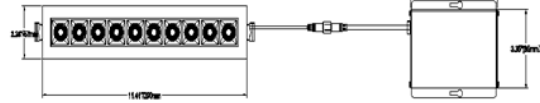

SPECIFICATIONS	
Application	Recessed Ceiling Mount
Light Output(lm)	<b>1200lm</b>
Watts	<b>15W</b>
Optional Driver Input	Triac Dimming
CRI	90
Color Temperature(k)	3000K
Input Volts & Frequency	120V 60Hz
Approved Location	Damp Location
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

SPECIFICATIONS	
Application	Recessed Ceiling Mount
Light Output(lm)	<b>2400Lm</b>
Watts	<b>30W</b>
Optional Driver Input	Triac Dimming
CRI	90
Color Temperature(k)	3000K
Input Volts & Frequency	120V 60Hz
Approved Location	Damp Location
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

### Ordering

	CCT	FINISH
NR5L-15W-3D90-38-GMW	3000 K	GMW (Gun Metal-Matte White)
NR5L-15W-3D90-38-GMB		GMB (Gun Metal-Matte Black)
NR10L-30W-3D90-38-GMW		GMW (Gun Metal-Matte White)
NR10L-30W-3D90-38-GMB		GMB (Gun Metal-Matte Black)

### Accessories

<h4>Mounting Plate</h4> <p><b>NR-7MULTI-NC</b> See Page 60</p>	<h4>Mounting Plate</h4> <p><b>NR10-NC</b> See Page 60</p>
--	---