

1 Inch

Trimless Downlight

- Durable airtight aluminum body
- Type IC, Air-Tight - No Housing Required
- Flangeless installation, to provide a high end look
- No housing required, easy and fast installation
- 100%-10% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- Rated for long life - over 50,000 hours




SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	7W
CRI	90Ra+
Color Temperature(K)	5CCT Selectable
Light Output(lm)	500lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Damp Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°


ORDERING

MODELS	CCT	FINISH
RA1RTL-7W-5CCT-D90-MW	5CCT selectable (2700-5000K)	MW (Matte White)
RA1STL-7W-5CCT-D90-MW		

DIMENSIONS

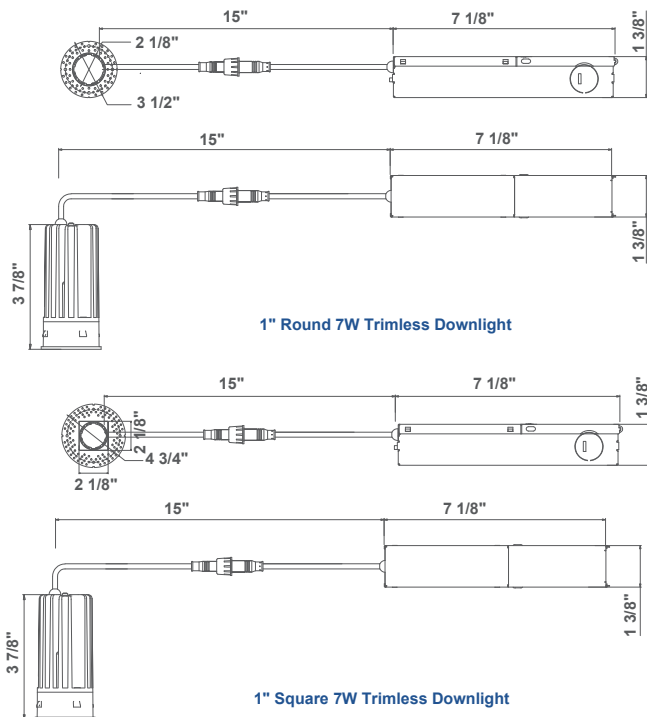

INSTALLATION

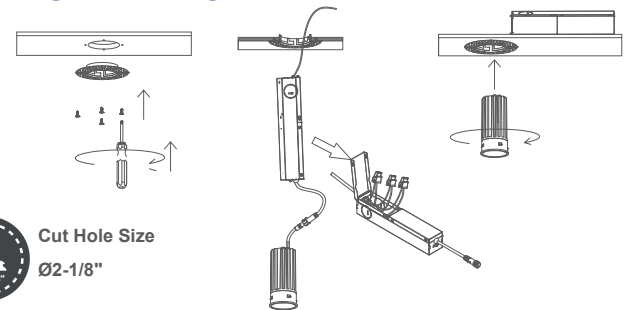

Cut Hole Size
Ø2-1/8"

Accessories

Emergency Driver



BL-ELD-15W
See Page 60