

2 Inch

Trimless Downlight


- Durable airtight aluminum body
- Type IC, Air-Tight & Damp - No Housing Required
- Flangeless installation, to provide a high end look
- No housing required, easy and fast installation
- 100%-10% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- Rated for long life - over 50,000 hours




SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	8W
CRI	90Ra+
Color Temperature(K)	5CCT Selectable (2700K to 5000k)
Light Output(lm)	600lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Damp Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

ORDERING


MODELS	CCT	FINISH
R2RTL-IC-8W-3D90-MW	3000K	MW(Matte White)
R2STL-IC-8W-3D90-MW	3000K	
R2RTL-IC-8W-5CCT-D90-MW	5CCT selectable	
R2STL-IC-8W-5CCT-D90-MW	(2700-5000K)	

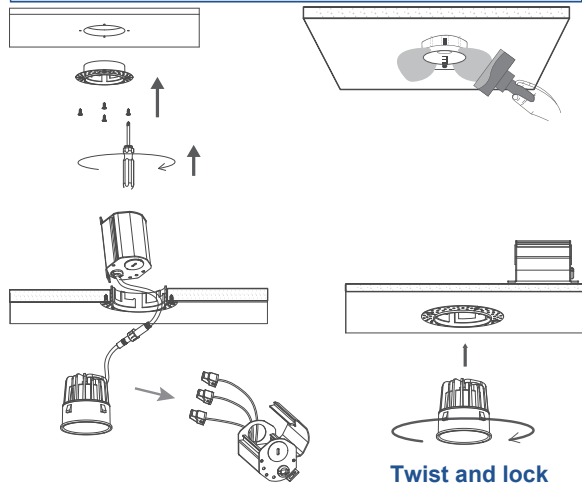

CUT
 Cut Hole Size
 Round: Ø2 3/5"
 Square: 2 4/5" x 2 4/5"

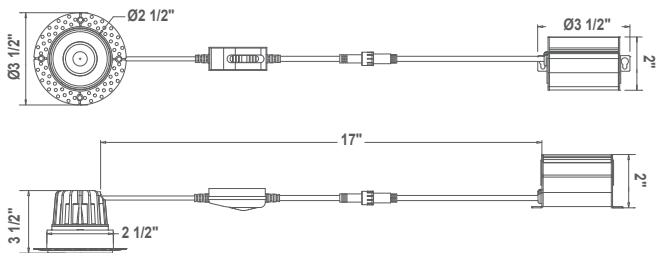

2" Round 8W Trimless Downlight

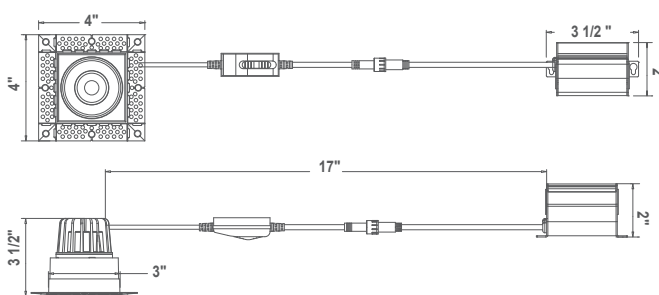

2" Square 8W Trimless Downlight

Accessories

Mounting Plate  R2.5-4-6-NC See Page 60	Emergency Backup  BL-ELD-15W See Page 60
---	--