
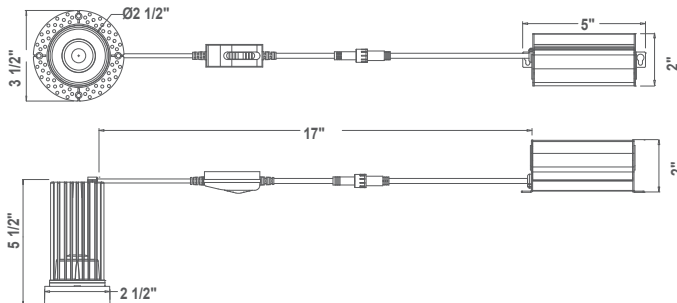


2


Inch

Trimless Downlight

- Durable airtight aluminum body
- Type IC, Air-Tight & Damp - No Housing Required
- Flangeless installation, to provide a higher end look
- No housing required, easy and fast installation
- 100%-10% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- Rated for long life - over 50,000 hours

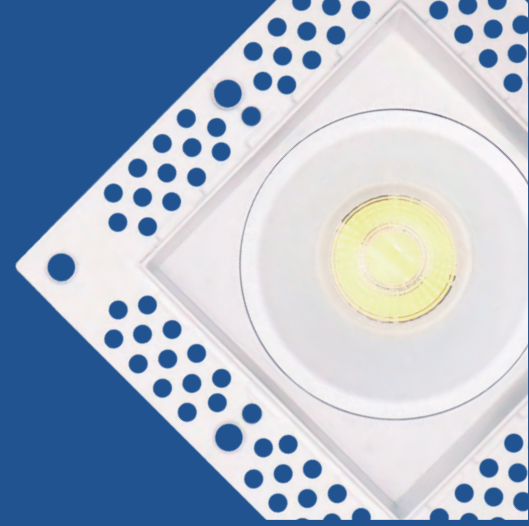

2" Round 15W Trimless Downlight

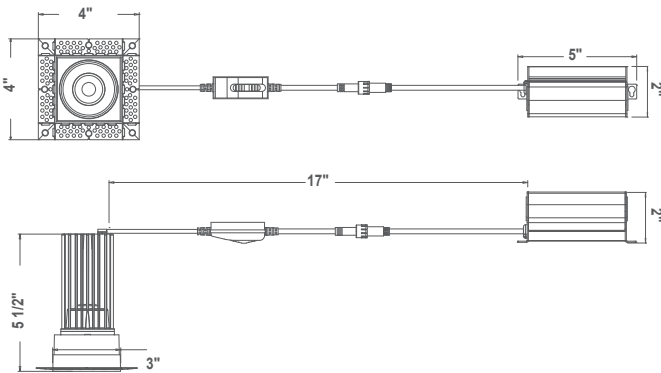

2" Square 15W Trimless Downlight


SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	15W
CRI	90Ra+
Color Temperature(K)	5CCT Selectable (2700k to 5000k)
Light Output(lm)	1000lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Damp Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

ORDERING

MODELS	CCT	FINISH
RA2RTL-IC-15W-3D90-MW	3000K	MW(Matte White)
RA2STL-IC-15W-3D90-MW	3000K	
RA2RTL-IC-15W-5CCT-D90-MW	5CCT selectable	
RA2STL-IC-15W-5CCT-D90-MW	(2700-5000K)	



Cut Hole Size
Round: Ø2 3/5"
Square: 2 4/5"x2 4/5"

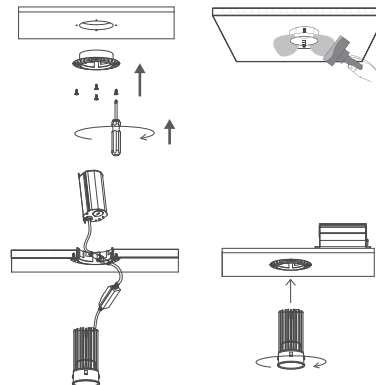

Twist and lock



Accessories

Mounting Plate
R2.5-4-6-NC
See Page 60

Emergency Backup
BL-ELD-15W
See Page 60

277 Optional Driver
RA2-277 VPS
See Page 60