

# 4 Inch

## Trimless Downlight

- Durable airtight aluminum body
- Type IC, Air-Tight & Damp - No Housing Required
- Flangeless installation, to provide a high end look.
- No housing required, easy and fast installation
- 100%-10% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- Rated for long life - over 50,000 hours



DAMP LOCATION

DIMMABLE

AIR TIGHT



IC RATED




SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	15W
CRI	90Ra+
Color Temperature(K)	5CCT Selectable 2700 to 5000k
Light Output(lm)	1000lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Damp Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

### ORDERING

MODELS	CCT	FINISH
RA4RTL-15W-5CCT-D90-MW	5CCT selectable	MW(Matte White)
RA4STL-15W-5CCT-D90-MW	(2700-5000K)	

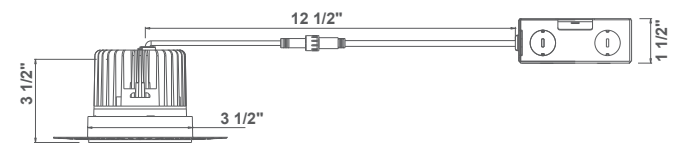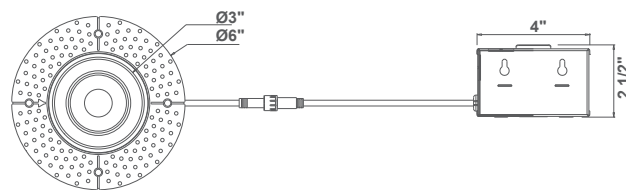

Cut Hole Size  
Ø3 3/4"

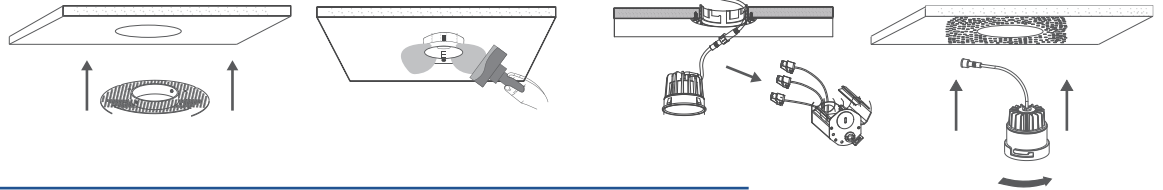

Twist and lock

### Accessories

**Mounting Plates**

R2.5-4-6-NC  
See Page 60

**Mounting Plate**

R4-NC  
See Page 60

**Emergency Backup**

BL-ELD-15W  
See Page 60

**277 Optional Driver**

RA4-277VPS  
See Page 60

