


# 10 Cells

## Trimless Micro Ray Downlight

- Durable airtight aluminum body
- Type IC, Damp Location - No Housing Required
- Flangeless installation, provide a more high end looking
- No housing required, easy and fast installation
- 100%-10% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- Rated for long life - over 50,000 hours



### INSTALLATION

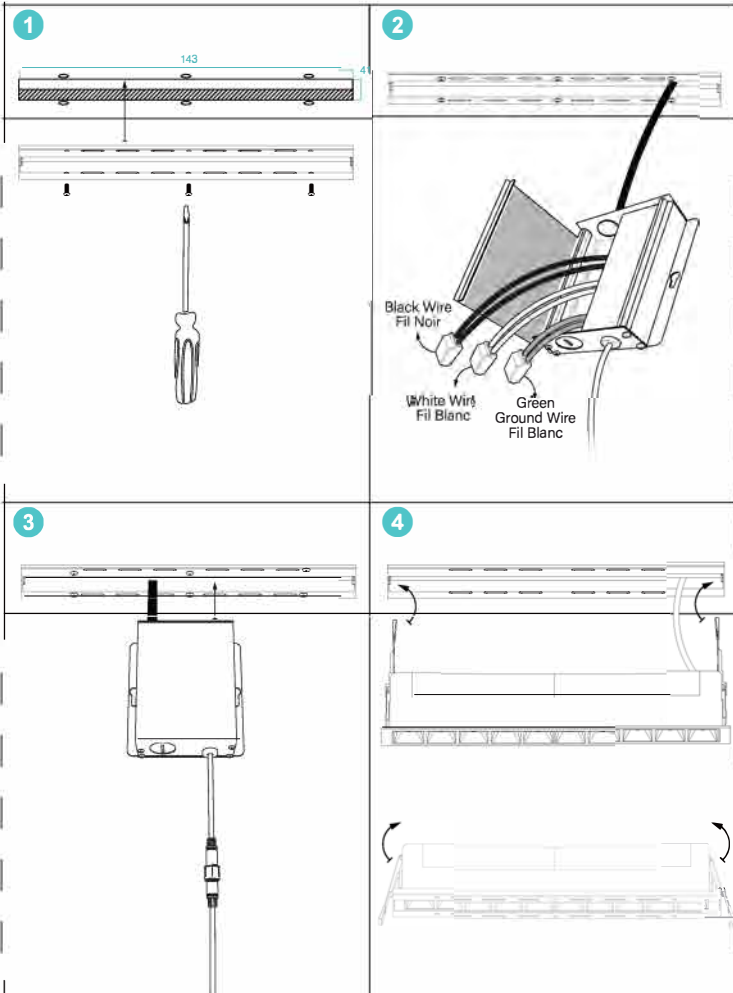

SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	20W
CRI	90Ra+
Color Temperature(K)	3000K
Light Ouput(lm)	<b>1500lm</b>
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0,9
Approved Location	Damp Location
IC Rated	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

### ORDERING

MODELS	CGT	FINISH
MR10TL-20W-3D90-38-MW	3000K	MW (Matte white)
MR10TL-20W-3D90-38-MWB		MWB (Matte White with Black)

### DIMENSIONS

