



3 Inch

LED Regressed Downlight Module and Trim.


- Two part system
- Type IC, Air-Tight & Wet - No Housing Required
- Aluminum die-cast construction
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Anti-glare design




2 PART SYSTEM

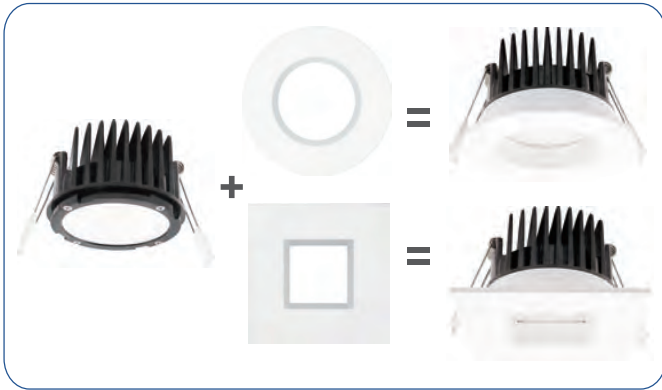


Module



3" Round Trim



3" Square Trim

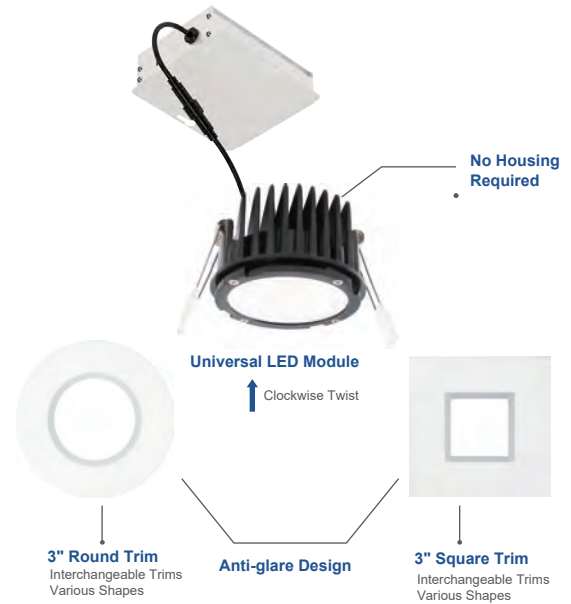


SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	10W
CRI	90Ra+
Color Temperature(K)	5CCT Selectable 2700K to 5000K
Light Output(lm)	650lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

Ordering


MODELS	CCT	FINISH
RA3-IC-10W-5CCT-D90	5CCT selectable (2700-5000K)	
RA3-RT-MW	ROUND TRIM	MW (Matte White)
RA3-ST-MW	SQUARE TRIM	MW (Matte White)

INSTALLATION

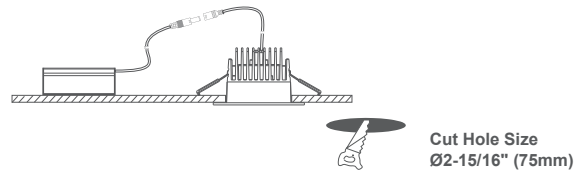

Accessories

Mounting Plate



R2.5-4-6-NC
See Page 60

Interchangeable Trims



RA3-RT-MW RA3-ST-MW

3" Reflector Trim
MW (Matte White)