



3.5 Inch

LED Regressed Gimbal

- Durable Aluminum body with adjustable gimbal
- Easy installation, no housing is required
- Dimming: TRIAC down to 10%
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Rated for a long life - over 50,000 hours

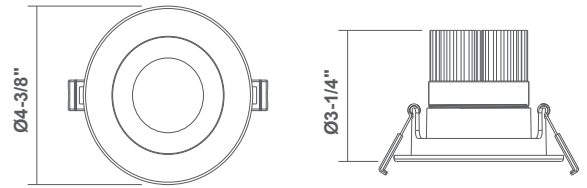

3.5" LED Regress Gimbal - Round

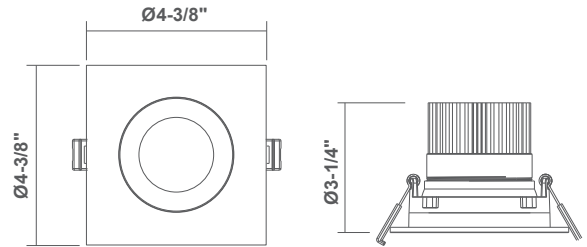



3.5" LED Regress Gimbal - Square

SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	12W
CRI	90Ra+
Color Temperature(K)	5CCT Selectable 2700K to 5000K
Light Output(lm)	800lm
Default Driver Input	AC120V, 60Hz
Optional Driver Input	Triac Dimming
Power Factor	>0.9
Approved Location	Damp Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	40°



Cut Hole Size
Ø3-3/4"

Overhead



Accessories

Mounting Plate



R3.5-NC

See Page 60

Emergency Driver



BL-ELD-15W

See Page 60

Ordering

MODELS	CCT	FINISH
R3.5RG-12W-5CCT-D90-MW	5CCT selectable (2700-5000K)	MW (Matte White)
R3.5SG-12W-5CCT-D90-MW		