




4 Inch

LED Regressed Downlight Module


- Interchangeable trims
- Type IC, Air-Tight & Wet - No Housing Required
- Aluminum die-cast construction
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Anti-glare design




2 PART SYSTEM

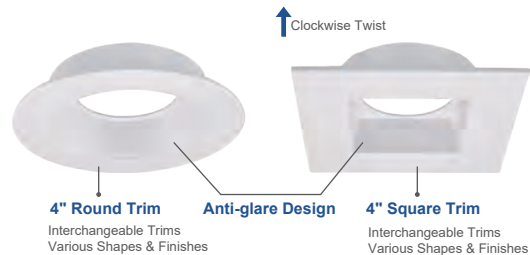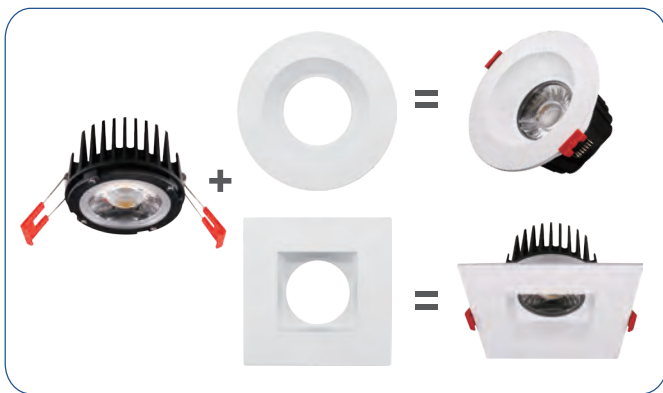


Module

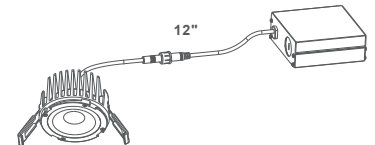

LED Module and Driver



4" Round Trim




4" Square Trim



Cut Hole Size
Ø3-3/4"

Accessories

Mounting Plate



R2.5-4-6-NC
OR
R4-NC
See Page 60

Emergency Driver



BL-ELD-15W

277 Optional Driver



RA4-277VPS

See Page 60

Interchangeable Trims



RA4-RT-MW RA4-RT-MW



RA4-ST-MBK RA4-ST-MBK

4" Reflector Trim
White/Black Options

SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	15W
CRI	90Ra+
Color Temperature(K)	5CCT Selectable 2700K to 5000K
Light Output(lm)	1000lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

Ordering

MODELS	CCT	FINISH
RA4-IC-15W-5CCT-D90	5CCT selectable (2700-5000K)	
RA4-RT-MW	Round MATTE WHITE Trim	MW (Matte White)
RA4-RT-MBK	Round MATTE BLACK Trim	
RA4-ST-MW	Square MATTE WHITE Trim	
RA4-ST-MBK	Square MATTE BLACK Trim	MBK(Matte Black)