



4 Inch

LED Regressed Gimbal

- Durable Aluminum body with adjustable gimbal
- Tilting gimbal light source for directional lighting
- Dimming: TRIAC down to 10%
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Rated for a long life - over 50,000 hours

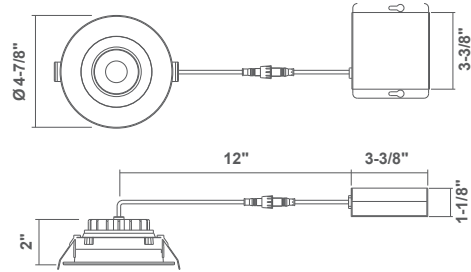


4" LED Regress Gimbal - Round

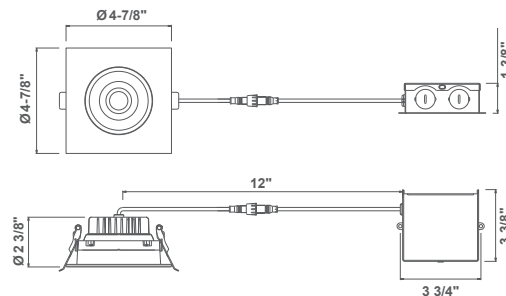

4" LED Regress Gimbal - Square



Cut Hole Size
Ø4-3/8"

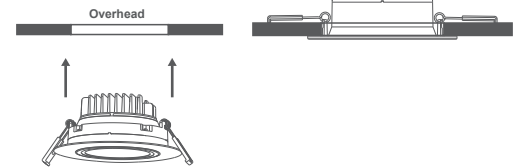


SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	12W
CRI	90Ra+
Color Temperature(K)	5CCT Selectable 2700K to 5000K
Light Output(lm)	850lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	40°

Ordering

MODELS	CCT	FINISH
RA4RG-12W-5CCT-D90-MW	5CCTselectable (2700-5000K)	MW (Matte White)
RA4SG-12W-5CCT-D90-MW		

Accessories

Mounting Plate



R2.5-4-6-NC

See Page 60

Mounting Plate



R4-NC

See Page 60

Emergency Driver



BL-ELD-15W

See Page 60