


# 24V Wall Washer

The 24V LED Wall Washer is engineered for illuminating architectural features, signage, and landscapes with its advanced lighting capabilities. It provides a versatile solution for both indoor and outdoor spaces, combining functionality with aesthetic enhancement.

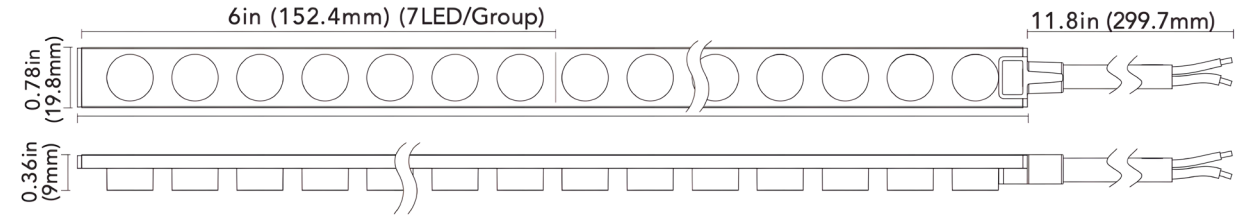

## FEATURES

- Safe 24V DC operation (Requires our 24V driver)
- Low power consumption: 5.8W/FT
- Suitable for indoor and outdoor use
- Beam angle: 30°
- Available in 2700K, 3000K, 4000K color temperatures
- Long life 30,000 hours
- Dimmable with dimmable drivers
- Field cuttable every 6" (Maximum run is 16ft.)
- Sold in 33 Rolls
- cULus certified for wet locations
- 3 years limited warranty

## APPLICATIONS

- Architectural lighting
- Signage
- Landscape lighting
- Exterior/interior commercial

## SPECIFICATIONS

Product Code		ES-LS2835-27K-42-24-30	ES-LS2835-30K-42-24-30	ES-LS2835-40K-42-24-30
Electrical	Input Voltage	24V DC		
	Power Consumption	5.8W/Ft		
Specs	Color Temperature	2700K	3000K	4000K
	Efficacy	100LM/W	105LM/W	110LM/W
	Luminous Flux	580LM/FT	610LM/FT	640LM/FT
	CRI	90+		
	Dimmable	Yes		
	Beam Angle	30°		
LED	Type	SMD2835		
	Life Span	30,000 Hours		
	Spacing	N/A		
	# per foot (304mm)	14		
Design	Dimensions	8mm (5/16") x 15mm (9/16")		
	Max Single Run Length	16Ft		
	Custom Cuttable	Every 6"		
	Approved Location	Indoor/Outdoor		
Mounting	Ceiling, floor			
Warranty	3 years			
Approvals	cULus for wet locations			

## PRODUCT CODES

ES - LS2835 - 27K - 42 - 24 - 30

ES - LS2835 - 30K - 42 - 24 - 30

ES - LS2835 - 40K - 42 - 24 - 30

## ACCESSORIES



**NFLX-GLUE**  
Glue



**ES-EC**  
End Cap



**ES-MC**  
Mounting Clips  
(4pcs/bag)




**ES-WB**  
Wall Washer Wall Bracket Set  
(2 pieces)



**ES-PFC-6FT**  
Power Feed Connector



**ES-JC-6IN 6IN,**  
**ES-JC-12IN 12IN,**  
**ES-JC-3FT 3FT,**  
**ES-JC-6FT 6FT**  
Jumper Cable



**ES-EXT**  
ES-EXT Aluminum extrusion (8FT), anodized black, for ceiling or floor mounting. For wall mounting, please see the wall mounting brackets.



Three wall mounting brackets available to enhance the wall washing effect (2 pieces):  
**ES-MB-2IN 2IN**  
**ES-MB-4IN 4IN**  
**ES-MB-6IN 6IN**  
Wall Mounting Bracket

## INDOOR/OUTDOOR DIMMABLE DRIVERS

**TRE24L40DC**  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

**TRE24L96DC**  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

## NON DIMMABLE DRIVERS

**LEDDR-24-120W (Indoor/Outdoor)**  
120W hardwire  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

NOTE: For field cuttability you will need power supply cap, End cap and potentially jumper cables. All termination points must be glued with our NFLX-GLUE. Please reach out if you have any questions, we would be happy to help.