

5CCT Fire Rated Thin Line

Designed to seamlessly merge into any environment, these fixtures combine sleek aesthetics with top-tier fire-resistant materials, ensuring not only captivating illumination but also adherence to stringent safety standards. Illuminate spaces with confidence, knowing you've chosen the best in style and safety.



FEATURES


- 2 hour fire rated: UL 263, ASTM E119 & CAN/ULC S101-14
- Two spring loaded clips to attach to any ceiling material
- White finish (interchangeable brushed nickel, black, oil-rubbed bronze, and copper trim rings available – sold separately)
- Wet locations listed
- No IC can required, for direct contact with insulation and combustible materials
- Optional 347V step-down
- 5 year limited warranty
- Airtight
- cETLus and Energy Star listed
- Comes with mounting brackets and end-to-end connector

APPLICATIONS

- Kitchens & pantries
- Laundry rooms
- Bathrooms
- Lobbies & hallways
- Banquet halls
- Elevators
- Retail lighting
- Offices & restaurants



DIAGRAM

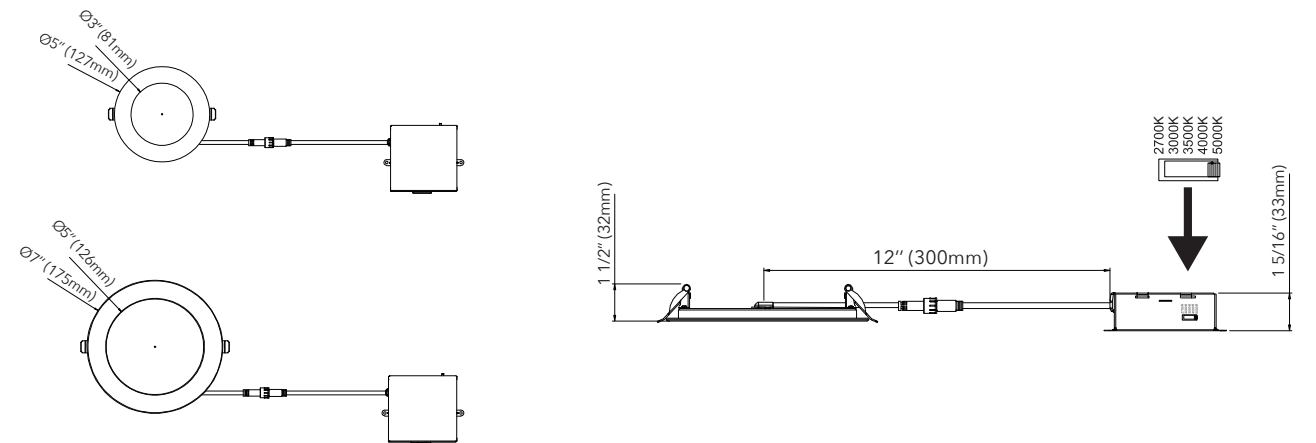

ACCESSORIES



- DL-FR-TR-4-YY**
TRIM RINGS
YY=
• BK (Black)
• BZ (Oil Rubbed Bronze)
• BN (Brushed Nickel)
• CP (Copper)



- DL-FR-TR-6-YY**
TRIM RINGS
YY=
• BK (Black)
• BZ (Oil Rubbed Bronze)
• BN (Brushed Nickel)
• CP (Copper)



- DL-FR-BR-4**
BEAUTY RINGS



- DL-FR-BR-6**
BEAUTY RINGS



- DL-FR-CP-4**
CONSTRUCTION PLATES



- DL-FR-CP-6**
CONSTRUCTION PLATES

SPECIFICATIONS

Product Codes		DL-FR-5CCT-4-WH	DL-FR-5CCT-6-WH
Electrical	Input Voltage	120V AC	
	Output Power (W)	12/15W	
Specs	Colour Temperature	5-position switch for colour temperature adjustment: 2700/3000/3500/4000/5000K	
	CRI	90+	
	Lumens	800/1100LM (size and CCT dependant)	
	Efficacy (LM/W)	N/A	
	Dimmable	Yes, with TRIAC dimmers	
	Beam Angle	120°	
LED	Type	Epistar	
	Life Span	50,000 Hours	
	Spacing	N/A	
	# per foot / unit	N/A	
Design	Dimensions Inches	D1=3", D2=5", H=1/2"	D1=5", D2=7", H=1/2"
	Dimensions Millimeters	D1=81mm, D2=127mm, H=11.5mm	D1=126mm, D2=175mm, H=11.5mm
	Finish	White finish	
	Trim Ring (Finish)	Brushed nickel, black, oil-rubbed bronze, and copper trim rings – Sold separately	
	Max Single Run Length	N/A	
	Custom Cuttable	N/A	
	Operating Temperature	-20° to +45°C	
	Approved Location	Wet	
	Mounting	Ceiling	
Warranty	5 years		
Approvals	cETLus and Energy Star		