

# LED TAPE LIGHT

## High Power RGB Outdoor

Great for enhancing outdoor spaces with a dynamic look. Suitable for hospitality, retail and commercial environments.



### HIGH POWER RGB OUTDOOR LTP-OD-RGB SERIES



#### FEATURES

- 50,000 hours life
- High brightness 5060 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 20' (6.1m) spools
- Safe, 24V class 2 power supplies (sold separately)
- 6 year limited warranty

#### APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting


#### PRODUCT CODES

LTP - OD - 20 - RGB

#### SPECIFICATIONS

Electrical	24V DC, 4.3W/ft
LED Type	High Brightness 5060 SMD LEDs
Viewing Angle	120°
LED Life	50,000 hours to 70% initial lumen output
LED Spacing	16mm (0.63")
# of LEDs per foot (304mm)	18
Maximum Single Run	20'
Custom Cuttable	4"
Approvals	cETLus

NOTE: Outdoor Tape Light comes with liquid-tight connectors pre-installed on both ends, so it is necessary to make the cuts starting from extremities. Cut pieces can be terminated, but not joined together.

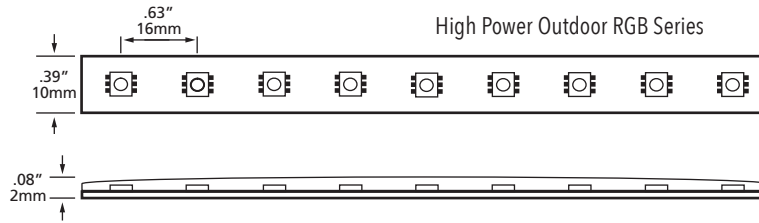

## ACCESSORIES




**LTP-RGB-001-OD-6FT**  
72" Power feed connector  
for RGB outdoor



**LV-FS-MC-004**  
Mounting clips



**LV-FS-EC-001**  
End caps



**LTP-010-S**  
Clear PVC mounting  
"U" channel



**LT-09S-RF**  
6 Key RGB "touch" controller  
12/24V DC



**LN-CON-WIFI-3CH-XV**  
WiFi controller for RGB,  
c/w RF remote 12/24VDC



**LV-ZJFFS-3CH-6INW**  
Outdoor RGB signal  
amplifier

**NOTE: See page 34-35 for the complete range of aluminum extrusions.**

## NON DIMMABLE DRIVERS

### LEDDR-24-120W

Indoor/Outdoor driver  
Max. recommended load 90W or 20' (6.1m) per single tap,  
120W or 27' (8.23m) combined two secondary taps.  
120W hardwire  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)