NATIONAL SPECIALTY LIGHTING

Well Light

Illuminate columns, fences, and trees discreetly with this well light. Designed for flush installation, it features a robust die-cast aluminum housing and a powerful integrated 6-watt LED. Waterproof and backed by a 15-year warranty.





FEATURES

- Low-profile design for discreet lighting
- Robust die-cast aluminum construction
- Silicon filled wirenuts
- IP67 rated
- Wet location listed
- Powerful 6-watt integrated LED
- Weatherproof for outdoor durability
- Bright 580-lumen output
- Stylish black finish for modern appeal
- Effortless installation with included sleeve
- Backed by 15 years warranty

APPLICATIONS


- Column and pillar illumination
- Pathway and boundary lighting
- Tree canopy highlighting
- Garden and seating area visibilityWater feature enhancement
- Step and stair safety lighting

| | | SPECIFICATIONS | |
|--------------|--------------------------|-------------------|-------------------|
| Product Code | | IG-01-12V-36D-BLK | IG-01-12V-60D-BLK |
| Electrical | Input Voltage | 12/24V AC/DC | |
| | Power Consumption | 6W | |
| Specs | Colour Temperature | 3000K | |
| | CRI | 90+ | |
| | Lumen Output | 580LM | |
| | Efficacy (LM/W) | 97 | |
| | Dimmable | N/A | |
| | Beam Angle | 36° | 60° |
| LED | Туре | SMD2835 | |
| | Life Span | 50,000 Hours | |
| Design | Dimensions (Inches) | 3.03 x 4.02" | |
| | Dimensions (Millimeters) | 76.9 x 102 mm | |
| | Finish | Black | |
| | Material | Die-cast Aluminum | |
| | Cable | Copper | |
| | Operating Temperature | -20 to 40°C | |
| | Approved Location | Outdoor | |
| | Mounting | In-ground | |
| Warranty | 15 years | | |
| Approvals | cETLus | | |





DIAGRAM

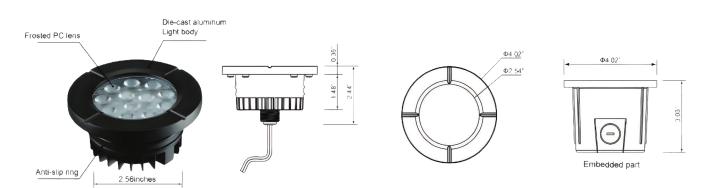

NSLUSA.COM

101