


Square LED Surface Mount Down Light



8", 14 watts Square LED Surface Mount Down Light is a low-profile down light intended for ceiling mount applications.

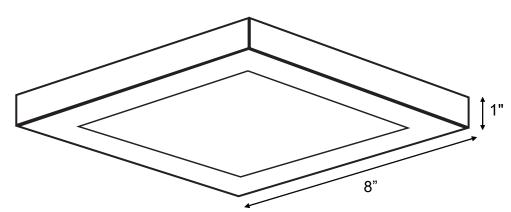

Includes

- (1) Surface mount fixture
- (1) Mounting plate
- (3) Wire Nuts
- (1) Fitting instruction
- (2) Wood screws
- *Specifications and dimensions subject to change without notice.

Features

- Driver on Board Technology, provides a 120V alternating current source and eliminates the need for traditional LED driver
- Quick & easy to install on standard junction box, ceiling mount with mounting plate
- · Die-cast aluminum housing
- · Smooth and continuous dimming, dimmable with most standard dimmers
- Rated for 50,000 hours
- · No light bulbs to replace or dispose
- Instant full brightness (including in sub-zero temperatures)
- 80+ CRI
- · cETLus listed for wet locations
- 5 year limited warranty are powder coat painted and available in the following finishes: White Gloss Enamel (WH), Bronze (BZ), Brushed Nickel (BN) and Black (BK)

-			
_	Specifications		
	Electrical	Input: AC 100 – 120V 14W	
	Power Factor	0.95	
۱	LEDs	Epistar	
	LED Life	50,000 hours	
	Lumen Output WW = Warm White NW = Neutral White	1000 WW, 1050 NW	
	Lumen Efficacy (LPW) WW = Warm White NW = Neutral White	71 WW, 75 NW	
	Color Temperature	Warm White 3000K Neutral White 4000K	
	CRI	≥80	
	Appearance Size (L x W x H)	8" x 8" x 1" (203mm x 203mm x 25mm)	
_	Approvals	cETLus listed for wet locations, Energy Star rated	

Ord	lering	Code
-----	--------	------

LED Color Trim Finish

LVLDL - SS - 08 - WW = Warm White (3000K) BK = Black
NW = Neutral White BZ = Bronze (4000K) BN = Brushed Nickel

Project	Туре	
oje ot	1,700	
Date	Contact	
Notos		









