

# LED Globe Light

LED Globe Light is a Marquee style decorative string light designed for the toughest of weather conditions.



## FEATURES


- 50,000 hours life
- Low power consumption
- Safe class 2, 24V power supply
- Field cuttable
- Multiple lamp spacings available
- Durable construction for indoor and outdoor use
- 2 year limited warranty

## APPLICATIONS

- Building outlines
- String across patios, walk ways, streets and public areas
- Under soffits
- Bridges
- Architectural features
- Window decorations
- Decks and patios

## PRODUCT CODES


### MGST - 12 - Y



## SPECIFICATIONS


Electrical	24V DC, .5W
Wiring	Directly wired to class 2, 24V power supply
Cable	PVC black SPT2, 16AWG outdoor rated
LED Life	50,000 hours
Maximum length	150' (45.6M) Not to exceed 180 lamps
Lumen Output	50 Lumens
Efficacy	100 Lumens per Watt
CRI	> 80
LED Colors	6000K, 2700K Red, Blue, Green and Amber also available upon request
Operating Temperature	-25°C to 65°C
Approvals	cETLus

## GLOBE LIGHT ASSEMBLY PRODUCT CODES



## OUTDOOR RATED CABLE

for attaching Globe Light Lamp Assemblies  
**ST16W**

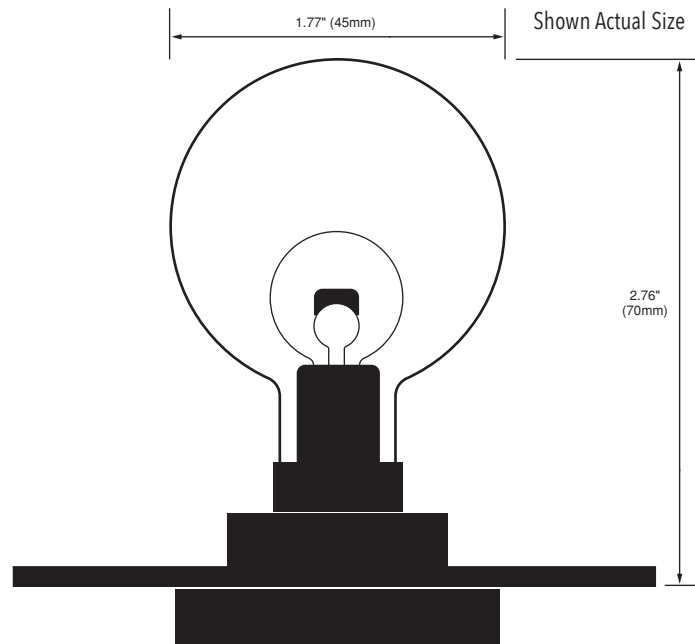

**ACCESSORIES**



**MGST-XX-LAMP**  
Replacement lamp



**MGEC**  
End cap for wire (Bag of 10)



**MGNC**  
Wood nail mounting clip



**MGWC**  
Tie wrap for mounting to wire

**ST16W**  
Outdoor rated cable for DIY mounting of LED Globe Light

**MGTP**  
Double sided tape (Bag of 50 pieces)

**INDOOR/OUTDOOR DIMMABLE DRIVERS**

**TRE24L40DC**  
Min 8 Watts, 16 Globes  
Max number of Globes = 80  
40 Watts  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

**TRE24L96DC**  
Min 8 Watts, 16 Globes  
Max number of Globes = 180  
96 Watts  
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

**NON DIMMABLE DRIVERS**

**LEDDR-24-120W**  
Indoor/Outdoor driver  
Max number of Globes = 180\*  
120W hardwire  
Input: 100 - 240V AC  
Output: 24V DC  
120 Watts  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

\* 180 on a single tap or 200 combined two secondary taps.