

5CCT Fire Rated Thin Line



Elevating safety, style, and design in one stroke

Designed to seamlessly merge into any environment, these fixtures combine sleek aesthetics with top-tier fire-resistant materials, ensuring not only captivating illumination but also adherence to stringent safety standards. Illuminate your spaces with confidence, knowing you've chosen the best in style and safety.

FEATURES

- 2h fire rated
- TRIAC dimmable
- 120° beam spread
- Adjustable color temperature 2700K/3000K/3500K/4000K/5000K
- Two spring loaded clips to attach to any ceiling material
- White finish (interchangeable brushed nickel, black, oil-rubbed bronze, and copper trim rings available - sold separately)
- Wet locations listed
- Temperature rating: -20°C to 45°C
- No IC can required, for direct contact with insulation and combustible materials
- Connects directly to 120V power supply
- Optional 347V Step-Down Transformer (non-dimmable)
- 5 year limited warranty
- Airtight
- 90CRI
- cETLus and Energy Star listed
- Comes with mounting brackets and end-to-end connector

APPLICATIONS

- Kitchens & Pantries
- Laundry Rooms
- Bathrooms
- Lobbies & Hallways
- Banquet Halls
- Elevators
- Retail lighting
- Offices & Restaurants




2 HOUR FIRE RATING
Tested to comply with UL 263,
ASTM E119 & CAN ULC S101



2700K/3000K/3500K/
4000K/5000K



YOUR TRUSTED LIGHTING PARTNER / NSLUSA.COM

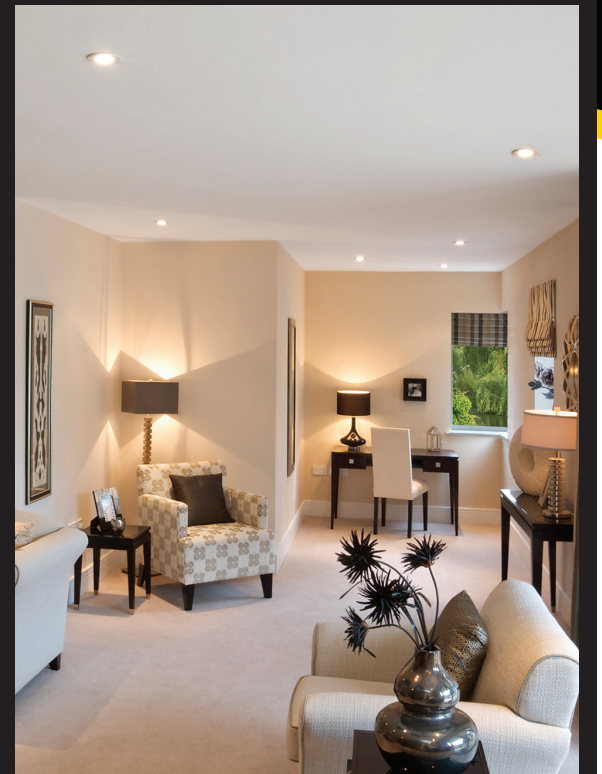

5CCT Fire Rated Thin Line

EASY INSTALLATION

Two spring loaded clips to attach to any ceiling material

ELECTRICAL

120V/60Hz


WARRANTY

5 Year Warranty. See full warranty details at www.nslusa.com.

SIZES


Available in 4" and 6" sizes.

APPEARANCE SIZE

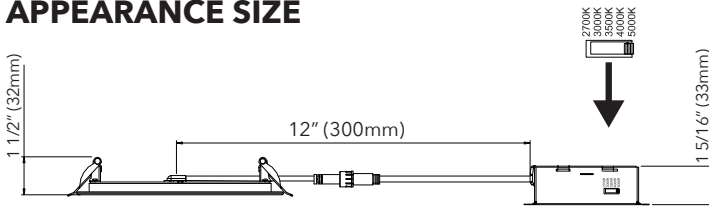

4"
D1=81mm (3")
D2=127mm (5")
H=11.5mm (1/2")

6"
D1=126mm (5")
D2=175mm (7")
H=11.5mm (1/2")

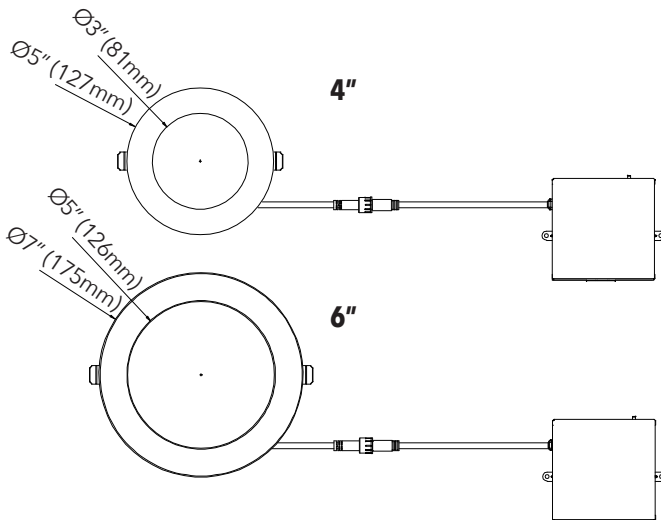

SPECIFICATIONS


Product Code	DL-FR-5CCT-4-WH DL-FR-5CCT-6-WH
Color Temperature	5-position switch for color temperature adjustment 2700K / 3000K / 3500K / 4000K / 5000K
Input Voltage	120V AC
Output Power (W)	12/15W
Lumens	800/1100LM (size and CCT dependant)
CRI	90+
Life Span (hours)	50,000
Dimmable	with TRIAC dimmers
Beam Angle	120°
Limited Warranty	5 years
Approvals	cETLus, Energy Star

ACCESSORIES

TRIM RINGS:

DL-FR-TR-4-YY
DL-FR-TR-6-YY

YY=BK (Black), BZ (Oil Rubbed Bronze),
BN (Brushed Nickel), CP (Copper)

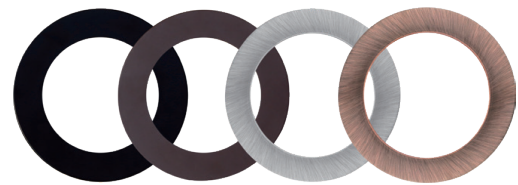

Black (BK) Oil Rubbed Bronze (BZ) Brushed Nickel (BN) Copper (CP)

CONSTRUCTION PLATES:

(optional for new construction)

DL-FR-CP-4
DL-FR-CP-6

BEAUTY RINGS:

DL-FR-BR-4
DL-FR-BR-6