

LED Wall Washer

NSL
NATIONAL SPECIALTY LIGHTING
YOUR TRUSTED LIGHTING PARTNER

Sleek, powerful and efficient

The LED Wall Washer is the ideal solution for architectural, signage and landscape lighting applications.

FEATURES




- Safe 24V DC operation
- Low power consumption: 5.8W/FT
- Suitable for indoor and outdoor use
- Beam angle: 30°
- Available in 2700K, 3000K, 4000K color temperatures
- Dimmable with dimmable drivers
- Field cuttable every 6". Custom cuts available.
- Long life 30, 000 hours
- cULus certified for wet locations
- 3 year limited warranty

APPLICATIONS

- Architectural lighting
- Signage
- Landscape lighting
- Exterior/interior commercial



DIMENSIONAL DIAGRAM

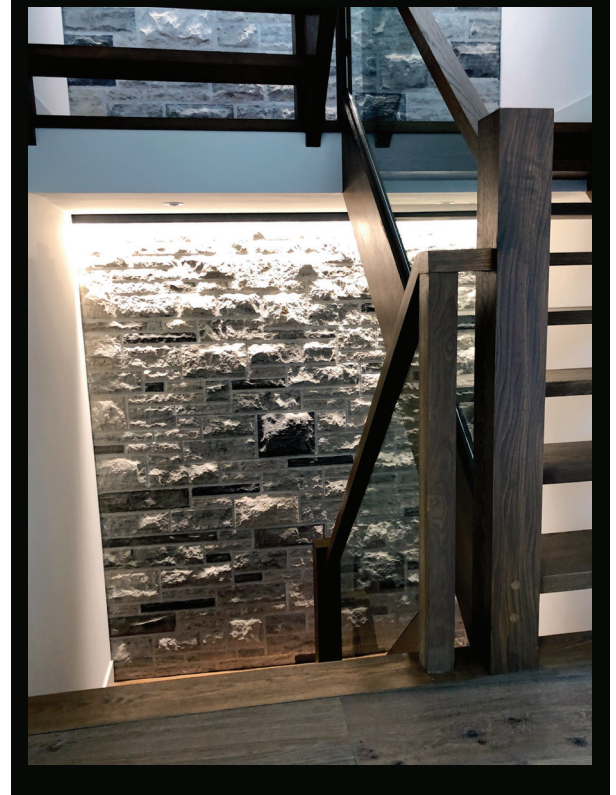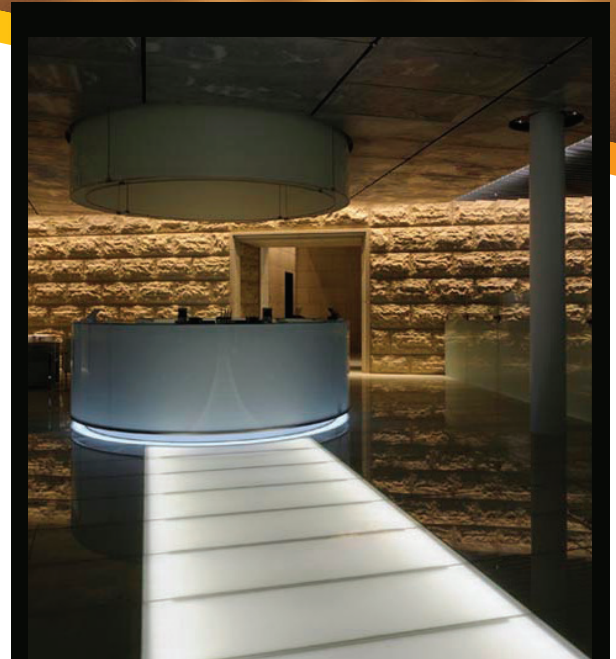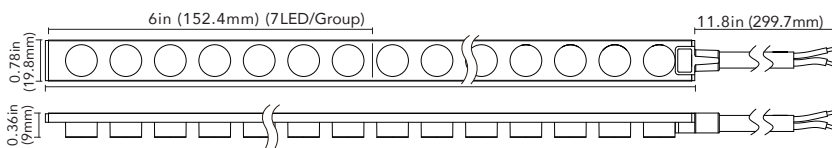

LED Wall Washer

EASY INSTALLATION

Field cuttable every 6". Custom lengths available.


ELECTRICAL

24V DC, 5.8W/FT

WARRANTY

3 Year Warranty. See full warranty details at www.nslusa.com.

EXTRUSIONS



ES-EXT

Aluminum extrusion (8FT), anodized black, for ceiling or floor mounting. For wall mounting, please see the wall mounting brackets.



Three wall mounting brackets available to enhance the wall washing effect in various applications.

ES-MB-2IN

2IN Wall Mounting Bracket

ES-MB-4IN

4IN Wall Mounting Bracket

ES-MB-6IN

6IN Wall Mounting Bracket



ES-MC

Mounting Clips (4pcs/bag)

ACCESSORIES



ES-PFC-6FT

6FT Power Feed Connector



ES-JC-6IN

6IN Jumper Cable

ES-JC-12IN


12IN Jumper Cable

ES-JC-3FT

3FT Jumper Cable

ES-JC-6FT

6FT Jumper Cable



ES-EC

End Cap



NFLX-GLUE

Glue

INDOOR/OUTDOOR DIMMABLE DRIVERS

TRE24L40DC

6.77" X 2.67" X 1.26" (171 X 68 X 32mm)

TRE24L96DC

6.77" X 2.67" X 1.26" (171 X 68 X 32mm)

NON-DIMMABLE DRIVERS

LEDDR-24-120W

Indoor/Outdoor driver 120W hardwire
Input: 100 - 240V AC; Output: 24V DC
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

SPECIFICATIONS

Product Code	ES-LS2835-27K-42-24-30 ES-LS2835-30K-42-24-30 ES-LS2835-40K-42-24-30
Color Temperature	2700K, 3000K, 4000K
Input Voltage	24V DC
Power Consumption (W)	5.8W/FT
Luminous Flux	580LM/FT(2700K), 610LM/FT(3000K), 640LM/FT(4000K)
Efficacy	100LM/W (2700K), 105LM/W (3000K), 110LM/W (4000K)
LEDs	SMD2835
Color Rendering Index	90+
Max Run	16 FT
Life Span (hours)	30,000
Beam Angle	30°
Approvals	cULus for wet locations

NOTE:

The product is sold in 33FT rolls, but the maximum single run is 16FT. Custom lengths available.