


T-Edge Lights (5CCT)

An innovative lighting solution, ideal for general and accent lighting in offices, hallways, and commercial applications. Its edge-lit design and 5CCT feature ensure versatile illumination, moving beyond traditional flat panels and troffers.



FEATURES

- Ideal replacement for traditional flat panel and troffers
- Non-flicker, no dark spots
- IP Rating: IP40
- cETLus and DLC premium listed
- Dry locations
- 5 year limited warranty

APPLICATIONS

- | | |
|--------------------|-------------------|
| RESIDENTIAL | COMMERCIAL |
| • Kitchens | • Retail |
| • Bathrooms | • Offices |
| • Laundry rooms | • Hallways |
| • Pantries | • Elevators |
| • Rec rooms | • Banquet halls |
| | • Restaurants |

SPECIFICATIONS


Product Code		TLE-2X2-K40-3065	TLE-2X4-K60-3065
Electrical	Input Voltage	100-277V AC	
	Power Consumption	20/30/40W Adjustable	40/50/60W Adjustable
Specs	Colour Temperature	3000/3500/4000/5000/6500K	
	CRI	80+	
	Lumen Output	2500-5000LM	5000-7500LM
	Efficacy (LM/W)	N/A	
	Dimmable	0-10V Dimming	
	Beam Angle	120°	
LED	Type	N/A	
	Life Span	50,000 Hours	
Design	Dimensions (Inches)	23.74 x 23.74 x 0.59"	23.74 x 47.76 x 0.59"
	Dimensions (Millimeters)	603 x 603 x 15mm	603 x 1213 x 15mm
	Finish	N/A	
	Housing Material	6063-T5	
	Operating Temperature	-20°-45°C	
	Approved Location	Dry	
Warranty	5 years		
Approvals	cETLus and DLC Premium		

PRODUCT CODES

TLE - 2X2 - K40 - 3065
TLE - 2X4 - K60 - 3065

SIZE WATTS

DIAGRAM

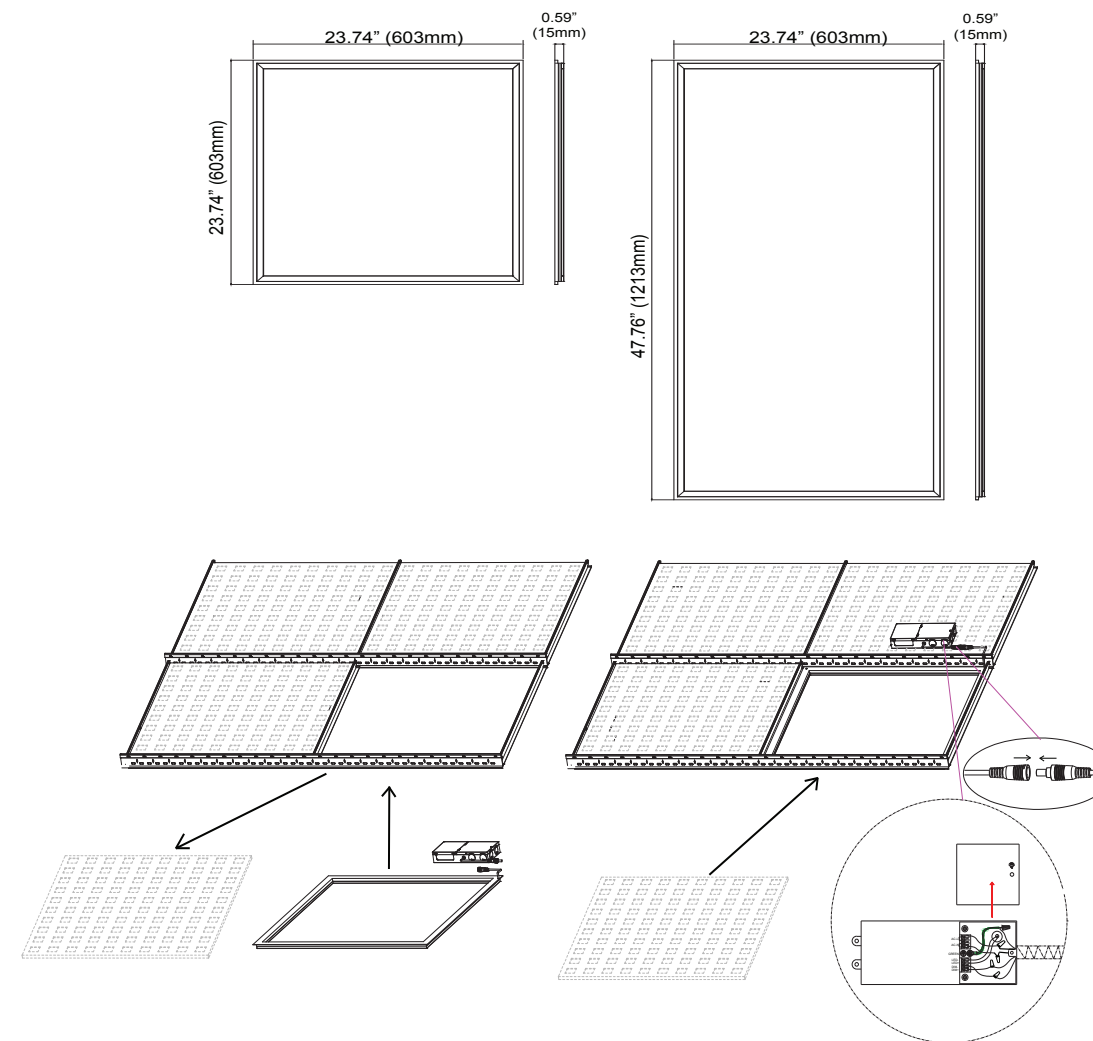

ACCESSORIES

- | | | |
|---|---|---|
| | | |
| TLE-DM
Driver mount bracket (for mounting the bracket to the T-BAR) | TLE-MC
Mounting clips (for fixture wire suspension) | ELP14-2060-UNV
Emergency Driver (sold separately) |

NOTES:

- TLE-EX-CCT-10: T-LED CCT Edge Light Extension Cord. 10ft is available.
- Driver mount bracket (TLE-DM), and mounting clips (TLE-MC) are available (sold separately). Please check your local building codes, if these accessories.