

5CCT LED Thin Line Down Light (Round)

Ideal for both commercial and residential settings, this versatile and cost-effective down light offers adjustable 5 color temperatures.



FEATURES

- TRIAC dimmable
- 120° beam spread
- Adjustable colour temperature
- Two spring loaded clips to attach to any ceiling material
- White finish (interchangeable: brushed nickel, black, bronze trim rings available - sold separately)
- Wet locations listed
- Temperature rating: -20°C to 45°C
- No IC can required, for direct contact with insulation and combustible materials
- Connects directly to 120V power supply
- Optional 347V Step-Down
- Transformer (non-dimmable)

APPLICATIONS

- Kitchens & pantries
- Laundry rooms
- Bathrooms
- Lobbies & hallways
- Banquet halls & elevators
- Retail lighting
- Offices & restaurants

SPECIFICATIONS

Size	3 Inches	4 Inches	6 Inches	8 Inches	10 Inches	
Product Code	DL-5CCT-3-WH	DL-5CCT-4-WH	DL-5CCT-6-WH	DL-5CCT-8-WH	DL-5CCT-10-WH	
Electrical	Input Voltage 120V AC					
	Power Consumption 6W	9W	12W	15W	20W	
Specs	Color Temperature 2700/3000/3500/4000/5000K					
	Lumen Output	420-445	627-684	995-1117	1368-1465	1817-1944
	Efficacy	70LM/W				
	CRI	90				
	Dimmable	Yes (TRIAC)				
	Beam Angle	120°				
LED	Type Epistar					
	Life Span 50,000 Hours					
Design	Dimensions (Inches)	3.1 x 3.8 x .5"	4 x 4.7 x .5"	6.14 x 6.85 x 0.5"	8 x 8.9 x 0.5"	10 x 10.8 x 0.5"
	Dimensions (Millimeters)	80 x 95.5 x 11.5mm	101 x 120.1 x 11.5mm	150 x 174.5 x 11.5mm	220 x 226 x 11.5mm	254 x 274 x 11.5mm
	Installation Hole Size	3.35" (85mm)	4.33" (110mm)	6.3" (160mm)	8.27" (210mm)	10.16" (258mm)
	Finish	White				
	Trim Finish	BK: Black, BZ: Bronze, BN: Brushed Nickel				
	Operating Temperature	-20°C to 45°C				
	Approved Location	Wet				
Mounting	Ceiling via spring loaded clips					
Warranty	5 years					
Approvals	cETLus and Energy Star					

PRODUCT CODES

DL-5CCT-YY-WH

5CCT LED Thin-Line Down Lights

SIZE
3: 3"
4: 4"
6: 6"
8: 8"
10: 10"


ROUND TRIM RINGS

(Sold Separately)

LVLDL - 03 - TR - XX - L3
LVLDL - 04 - TR - XX - L3
LVLDL - 06 - TR - XX - L3
LVLDL - 08 - TR - XX - L3
LVLDL - 10 - TR - XX - L3

TRIM RING FINISH
BK: Black, BZ: Bronze; BN - Brushed Nickel

DIAGRAM

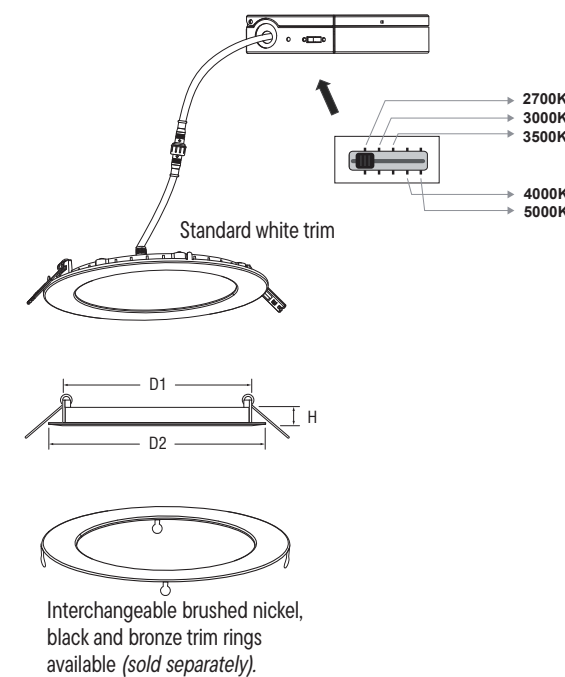

ACCESSORIES



LVLDL-YY-TR-XX-L3
Trim Rings For 5 CCT LED Thin Line Down Light (sold separately).

CONSTRUCTION PLATES

